




Almega Friendly series
Medium Class Robot
FD-V25

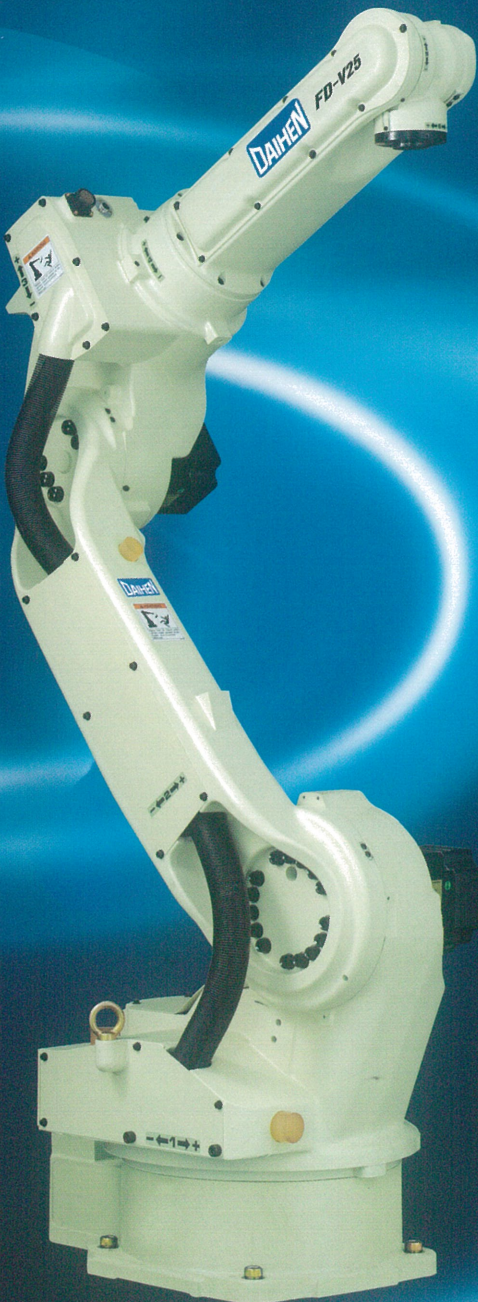

**Application range has
been expanded
due to increased
maximum payload.**

**Improved in every aspect of
performance!**



**Maximum payload of 25kg
Interference behind the robot
minimized by integrating cables into
the lower arm**

Application range has been expanded due to increased maximum payload.

FD-V25

Faster cycle time

Due to the industry's fastest speeds, cycle times are reduced.

Stronger structure

The maximum payload has been increased by 25%, up to 25kg. Expands support for various handling applications.


User-friendly operation

Integrated signal cables and air hoses to accommodate a variety of end effectors

More robust

Splash-proof and dust-proof design equivalent to IP64 enclosure rating

Manipulator Working Range

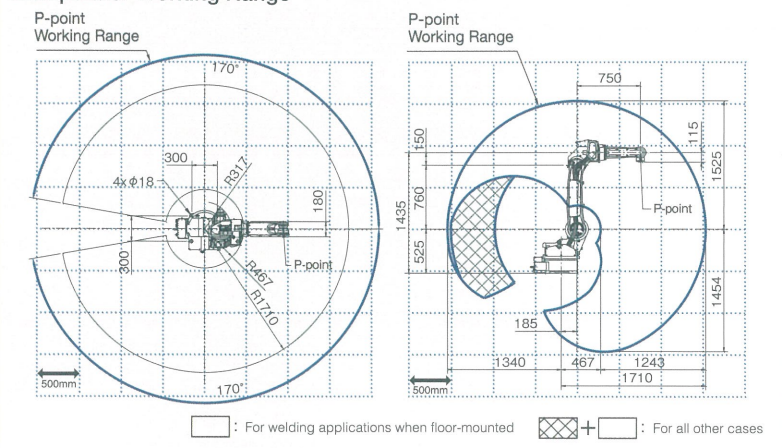

Manipulator Specifications

		FD-V25
Structure		Vertical articulated type
Number of Axes		6
Max. Payload Capacity		25kg
Positional Repeatability		±0.07mm (Note 1)
Drive System		AC servomotor
Drive Capacity		5600W
Position Feedback		Absolute encoder
Working Range	J1 (Rotation)	±170° (±50°) (Note 2)
	Arm J2 (Lower Arm)	-155°~+100° (Note 3)
	J3 (Upper Arm)	-170°~+260°
	J4 (Swing)	±180°
	Wrist J5 (Bending)	-50°~+230°
	J6 (Twist)	±360°
Maximum Speed	J1 (Rotation)	3.40rad/s (3.05) {195°/s (175°/s)} (Note 2)
	Arm J2 (Lower Arm)	3.32rad/s {190°/s}
	J3 (Upper Arm)	3.14rad/s {180°/s}
	J4 (Swing)	6.98rad/s {400°/s}
	Wrist J5 (Bending)	6.98rad/s {400°/s}
	J6 (Twist)	10.47rad/s {600°/s}
Wrist Allowable Load	J4 (Swing)	52.6N·m
	J5 (Bending)	52.6N·m
	J6 (Twist)	24.5N·m
	Allowable Moment of J4 (Swing)	1.24kg·m ²
	J5 (Bending)	1.24kg·m ²
	J6 (Twist)	0.33kg·m ²
Arm Cross-sectional Area		5.27m ² × 340°
Ambient Conditions		Temp: 0 to 45°C, Hmd: 20 to 80%RH (No Condensation)
Mass (weight)		278kg
Upper Arm Payload Capacity		10kg (Wrist capacity: 25kg) (Note 4)
Installation Type		Floor, wall, or ceiling
Paint Color		White (Munsell notation 10GY 9/1)

Notes

1. Positional repeatability of the tool center point (TCP) value complies with the JIS-B-8432 Standard.
2. Specifications for wall mounting appear in parentheses.
3. The working range of the J2 axis may be restricted when wall-mounted.
4. The capacity of the upper arm varies with the wrist capacity.

In accordance with DAIHEN's policy to make continuing improvements, design and/or specifications are subject to change without notice and without any obligation on the part of manufacturer.

DAIHEN Corporation

4-1, Koyochonishi, Higashinada-ku, Kobe, Hyogo 658-0033, Japan
 Phone: (Country Code 81) 78-275-2006
 Fax: (Country Code 81) 78-845-8159

Distributed by:

Note This product and the technologies (including software) used in the product are subject to Catch-All Controls. When exporting any of them, verify the users, applications, etc. according to the applicable laws and regulations and take appropriate procedures such as applications for export permission to the Minister of Economy, Trade and Industry if required.

- The information contained in this catalog is current as of November 2017 and is subject to revision without notice.
- This catalog was printed with environmentally-friendly vegetable oil ink.